



Photo 1: Dual Lamp DL 026 Seris with on/off switch Photo 2: Dual Lamp DL 026 Series with movement sensor

## Versatile – base lamp or hand lamp


- Long-life energy saving lamp
- On/off switch or movement sensor
- Connections for further lamps

The Dual Lamp 026 is available with on/off switch or movement sensor (the movement sensor version was designed to elimanate the need for a door switch). The PIR movement sensor switches the lamp on when the enclosure door is opened. The switch-on time is reset with every further registered movement. The movement sensor does not react to movement on the other side of glass and so can be used in enclosures with glass doors.




## **Technical Data**

Luminosity     1000 Lm (equals 100W light bulb)       Lamp type     energy saving lamp, E27 socket       Service life     10,000h       Mounting     screw fixing (e.g. 35mm DIN rail)       Casing     plastic according to UL94 V-0, light grey
Service life 10,000h  Mounting screw fixing (e.g. 35mm DIN rail)
Mounting screw fixing (e.g. 35mm DIN rail)
Casing plastic according to UL94 V-0, light grey
Weight approx. 0.6kg
Fitting position variable
<b>Operating / Storage temperature</b> -20 to +50°C (-4 to +122°F) / -45 to +70°C (-49 to +158°F)
Operating / Storage humidity max. 90 % RH (non-condensing)
Protection type / Protection class IP20 / II (double insulated)
Approvals -
Accessories see illustration below
Note 120VAC and DC voltages on request

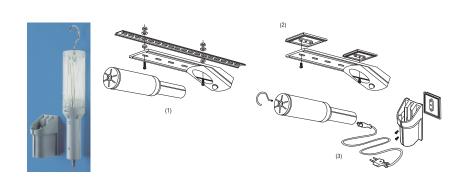

- (1) Standard screw fixing to DIN rail
- (2) 2 self-adhesive fixing plates, Art. No. 09515.0-00
- (3) Wall holder with connection cable (2m), hook and self-adhesive fixing plate, Art. No. 03410.0-00. By using an additional wall holder the lamp can be used as a hand lamp.

396	



Art. No.	Operating voltage	Power consumption	Switch	Connection
02600.0-00	230VAC, 50Hz	20 W	on/off push switch	6-pole screw connector 2.5mm² (torque 0.5Nm max.) for power connection, further lamps and external door contact switch
02601.0-00	230VAC, 50Hz	20 W	PIR movement sensor, approx. 3min. fixed switch-on duration	4-pole screw connector 2.5mm² (torque 0.5Nm max.) for power connection and further lamps