

Lamp shown with protective plastic cover (see Accessories)




- Magnetic or optional DIN rail mounting**
- Energy-saving lamp**
- Lamp without/with electrical socket**  
**(choice of sockets)**
- On/Off switch**

The compact lamp KL 025 was especially designed for use in enclosures. A powerful magnet enables the lamp to be mounted freely in any desired position in metal enclosures saving time and installation problems. The integrated electrical socket allows the use of additional appliances.




### Technical Data

<b>Luminosity</b>	900 Lm (equals light bulb 75W/230VAC, 60W/120VAC)
<b>Lamp type</b>	compact fluorescent lamp with integral starter
<b>Service life</b>	5,000 h
<b>Switch</b>	on/off light switch
<b>Connection</b>	3-pole terminal 2.5mm <sup>2</sup> with cable clamp, torque 0.8Nm max.
<b>Mounting</b>	magnet fixing
<b>Casing</b>	plastic, light grey
<b>Dimensions</b>	355 x 65 x 70mm
<b>Weight</b>	approx. 1.kg
<b>Fitting position</b>	variable
<b>Operating / Storage temperature</b>	-20 to +50°C (-4 to +122°F) / -45 to +70°C (-49 to +158°F)
<b>Operating / Storage humidity</b>	max. 90 % RH (non-condensing)
<b>Protection type</b>	IP20
<b>Accessories</b>	lamp cover, Art. No. 09520.0-00 (see photo)

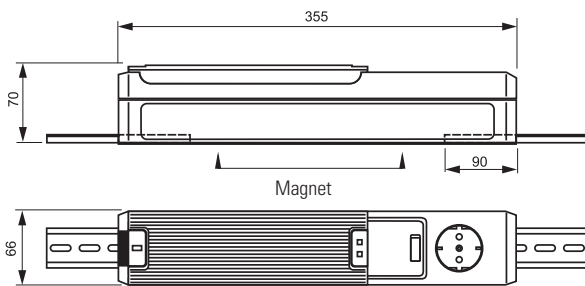

In plastic, aluminium or stainless steel cabinets the lamp can be fixed using screws together with inserted 35mm DIN rail sections.



Art. No.	Operating Voltage	Socket	Power consumption	Nominal Current	Protection class	Approvals
02500.0-00	230VAC, 50Hz	Germany/Russia (1)	11W	16.0A	I (earthed)	VDE
02500.0-07	230VAC, 50Hz	none	11W	-	II (double insulated)	-
02501.0-00	230VAC, 50Hz	F/PL/CZ/SK (2)	11W	16.0A	I (earthed)	-
02502.0-00	230VAC, 50Hz	Switzerland (3)	11W	10.0A	I (earthed)	-
02510.0-00	230VAC, 50Hz	UK/Ireland (4)	11W	13.0A	I (earthed)	-
02512.0-00	230VAC, 50Hz	Italy (6)	11W	16.0A	I (earthed)	-
02505.9-00	120VAC, 60Hz	USA/Canada (5)	9W	15.0A	I (earthed)	-
02505.9-01	120VAC, 60Hz	none	9W	-	II (double insulated)	-